

Teleprinter 30A

Receive-only Teleprinter



Benefits

No need for a specially trained operator.

Compact design.

Quiet operation.

No special accommodation required.

Simple to use.

General description

The Teleprinter 30A is a semi-electronic, receive-only teleprinter in two-tone grey. It can be supplied either as a desk-top unit, or with a black pedestal as an optional extra.

Facilities

When connected either to the Post Office telex system or to a private telegraph circuit, the Teleprinter 30A may function as a monitor, reproducing the texts of either transmitted or received messages.

On private circuits only, the machine may alternatively function as a terminal, receiving messages from a distant teleprinter, Broadcast Unit, Private Automatic Telegraph Branch Exchange or a Message Switcher. The Teleprinter 30A cannot be used as a terminal on public telex lines however, as it cannot transmit an 'answer-back' code or message of any kind.

It must be decided before installation, whether the Teleprinter 30A is to be used as a monitor or terminal, so that it can be wired accordingly.

By using a private circuit to connect the Teleprinter 30A to the main teleprinter, the two machines may be sited up to 1 km apart, provided that both teleprinters are in the same telex exchange area.

Standard telegraph or data codes may be employed as required and will be provided by permanent wiring prior to installation.

The Teleprinter 30A can operate at all the standard telex and telegraph speeds, the choice of speeds depends on the medium to which it is connected.

It can print up to 69 characters or spaces on each line on standard teleprinter paper which can be single-ply or multi-ply paper giving up to 3 under copies.

The user can set the line feed for single, one-and-a-half or double spacing.

General information

The printed characters are formed by a 'dot matrix'. This method of printing, and the absence of a keyboard, allows a considerable reduction in size and noise levels.

Messages can be received at all times provided the power is switched on and there is an adequate supply of paper in the teleprinter. The Teleprinter 30A switches on and off automatically at the start and finish of any communication.


The teleprinter cover has a hinged lid, giving easy access for paper and ribbon replacement.

The lid incorporates a window which makes the copy visible during message reception and provides a cutting edge for message removal.

Power for the Teleprinter 30A is drawn from a 3-pin mains socket outlet of at least 3-amp rating, provided by the customer.

Dimensions

Height 121mm (with Pedestal 746mm)
Width 321mm
Length 451mm
Weight 11.34 kgs (without Pedestal)

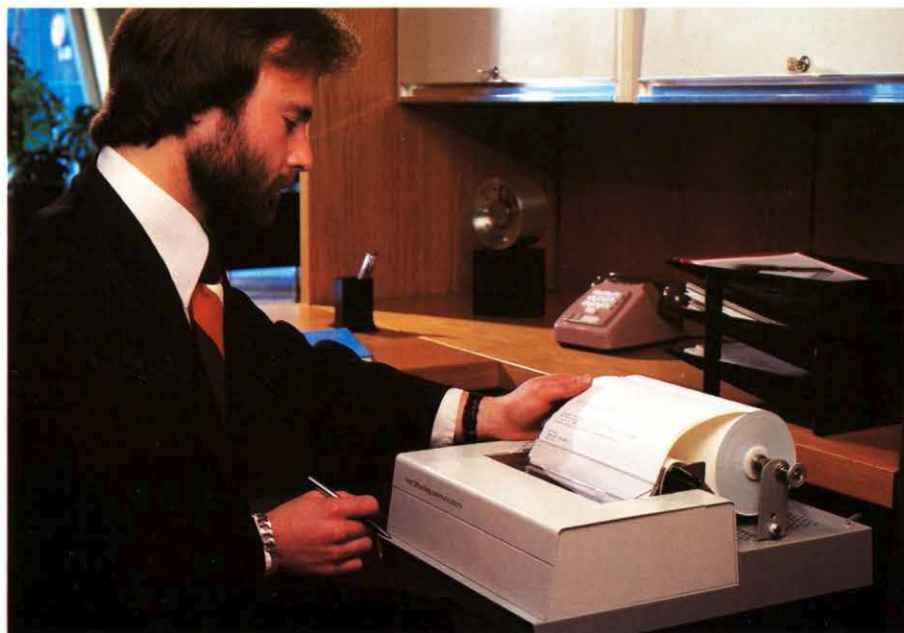

Please note

We do our best to supply our customers with the apparatus they ask for but we may have to provide apparatus which does not accord exactly with the descriptions and illustrations in this leaflet.

Your Telephone Sales Office will gladly supply any further information or details of any changes in the information in this leaflet since it went to print. The address and telephone number are shown in the preface of your Telephone Directory. Information on a wide range of our services and apparatus is contained in the Green Pages section of most Telephone Directories.