


TO EXTENSION LINE  
CCT. AND TO LINE  
VIA IDF  
(WHEN PROVIDED)

TO LINE  
VIA IDF  
(WHEN IDF IS  
NOT PROVIDED)

- NOTES :-
1. FUSE 1.5A PER SELECTOR
  2. CUT STRAP U26-U28 FOR CALLING PAR RELEASE
  3. WHEN INT. RINGING EARTH IS EMPLOYED DISCONNECT STRAPS U23-U25 & U27-U29. STRAP U23-U25 & U25-U27.
  4. ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED.
  5. Ø FOR WIRING SEE RELEVANT RACK COMMON SERVICES DIAGRAM

BATT BK 22 SWG. FUSE **1B2** U12  
ETH R 22 SWG ETH BAR **1A2** U11

BATT W U12-D2-R5b-R2b-R35-Ae-VM2-RMe  
ETH R U11-F3-Da-B23-Ba-B8-R4a-A6-A1-E25-H1-R1a

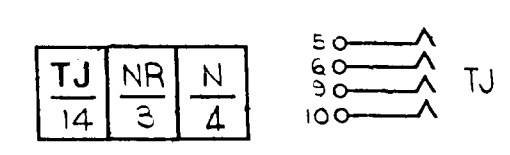

				FINAL SELECTOR (REGULAR) 100 LINE FOR P.A.B X No.3	
AMENDMENT PARTICULARS		ISSUE DATE	APPR	REF. S 333	50 V W
S.F.O APPROVED AS STANDARD		16.11.66			
P.T. Ltd Beacons	DRAWN P	CHECKED	WIRING	CIRCUIT R.E.D.	SAW 81532